

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE SAFETY MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera épuisé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

ACTIVE SAFETY



OSAS



USAS



OPAS

* F_{1i} =

Isothermal end force at 100% Cu



p. 16

** F_{1p} =


Polytrophic end force at 100% Cu



N ₂	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 6,15 cm ² 0.953 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV01000C
----------------	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	-----------------------------	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F ₀ Initial force		F _{1i} * End force *		F _{1p} ** End force **		V ₀		PED 2014/68/EU		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	✓
RG 1000 - 010 - A	◆ RG 1000 - 010 - B	10	0.39	72	2.83	62	2.44	920 2068 ± 5%	150 bar 2175 psi	1281	2881	1493	3357	25,6	1.56	0,67	1.48	✓
RG 1000 - 013 - A	◆ RG 1000 - 013 - B	13	0.51	78	3.07	65	2.56			1331	2992	1570	3531	30,3	1.85	0,70	1.54	✓
RG 1000 - 016 - A	RG 1000 - 016 - B	16	0.63	84	3.31	68	2.68			1370	3079	1631	3667	35,0	2.14	0,72	1.59	✓
RG 1000 - 019 - A	RG 1000 - 019 - B	19	0.75	90	3.54	71	2.80			1401	3149	1680	3778	39,6	2.42	0,75	1.65	✓
RG 1000 - 025 - A	RG 1000 - 025 - B	25	0.98	102	4.02	77	3.03			1447	3253	1755	3945	49,0	2.99	0,79	1.74	✓
RG 1000 - 032 - A	RG 1000 - 032 - B	32	1.26	116	4.57	84	3.31			1485	3339	1816	4083	59,9	3.66	0,85	1.87	✓
RG 1000 - 038 - A	RG 1000 - 038 - B	38	1.50	128	5.04	90	3.54			1509	3392	1855	4170	69,2	4.22	0,90	1.98	✓
RG 1000 - 050 - A	RG 1000 - 050 - B	50	1.97	152	5.98	102	4.02			1543	3468	1910	4294	87,9	5.36	0,99	2.18	✓
RG 1000 - 063 - A	RG 1000 - 063 - B	63	2.48	178	7.01	115	4.53			1567	3522	1950	4384	108,2	6.60	1,10	2.43	✓
RG 1000 - 075 - A	RG 1000 - 075 - B	75	2.95	202	7.95	127	5.00			1583	3558	1976	4442	126,9	7.74	1,19	2.62	✓
RG 1000 - 080 - A	RG 1000 - 080 - B	80	3.15	212	8.35	132	5.20	1588	3570	1985	4462	134,7	8.22	1,23	2.71	✓		
RG 1000 - 100 - A	RG 1000 - 100 - B	100	3.94	252	9.92	152	5.98	1605	3607	2013	4524	165,8	10.12	1,39	3.06	✓		
RG 1000 - 125 - A	RG 1000 - 125 - B	125	4.92	302	11.89	177	6.97	1618	3638	2036	4577	204,8	12.50	1,60	3.53	✓		

◆ Disposable

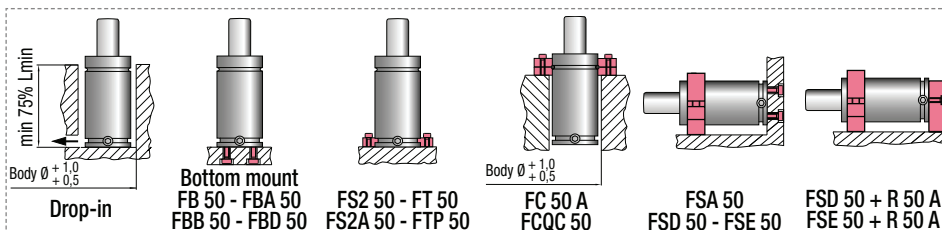

HOW TO ORDER

p. 95

INSTALLATION GUIDELINE

p. 205