



OSAS + OSM = **OVER STROKE ACTIVE SAFETY** + **OVER STROKE MARKER**

ACTIVE SAFETY



OSAS



USAS



OPAS

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo



O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F_{1i} =$

Isothermal end force at 100% Cu p. 16

** $F_{1p} =$


Polytropic end force at 100% Cu

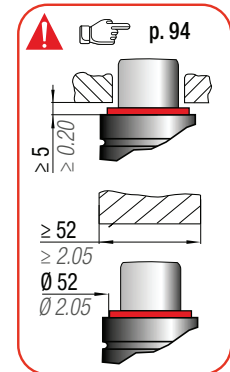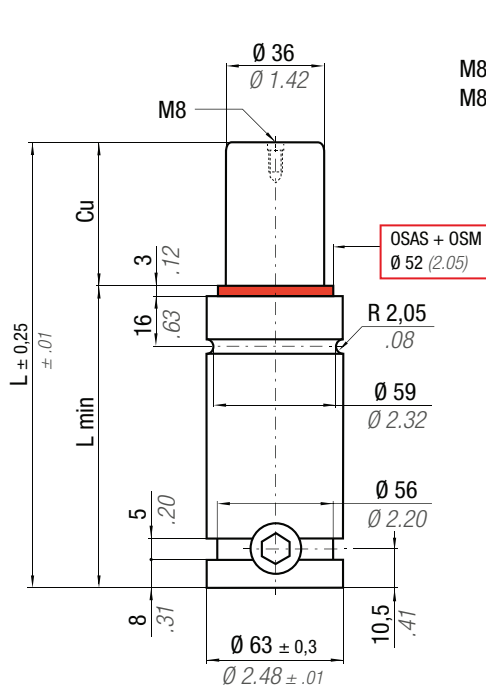

N₂	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 10,18 cm ² 1,578 in ²	SPM ~ 20 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV01500C
----------------------	--------------------------	--------------------------	-------------------------------------	-----------------------------------	------------------------------------------------------------	---------------------------------------	-----------------------------	----------------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F ₀		F _{1i} *		F _{1p} **		V ₀		~Kg	~lb	2014/68/EU
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³			
RG 1500 - 010 - A	◆ RG 1500 - 010 - B	10	0.39	72	2.83	62	2.44	1530 ± 5%	3440	2078	4671	2406	5409	45	2.72	1,04	2.29	✓
RG 1500 - 013 - A	◆ RG 1500 - 013 - B	13	0.51	78	3.07	65	2.56			2157	4848	2528	5683	53	3.20	1,08	2.38	✓
RG 1500 - 016 - A	◆ RG 1500 - 016 - B	16	0.63	84	3.31	68	2.68			2218	4987	2624	5900	61	3.69	1,11	2.45	✓
RG 1500 - 019 - A	RG 1500 - 019 - B	19	0.75	90	3.54	71	2.80			2268	5099	2703	6076	68	4.17	1,15	2.54	✓
RG 1500 - 025 - A	RG 1500 - 025 - B	25	0.98	102	4.02	77	3.03			2343	5267	2822	6344	84	5.14	1,22	2.69	✓
RG 1500 - 032 - A	RG 1500 - 032 - B	32	1.26	116	4.57	84	3.31			2405	5406	2921	6566	103	6.27	1,30	2.87	✓
RG 1500 - 038 - A	RG 1500 - 038 - B	38	1.50	128	5.04	90	3.54			2444	5493	2984	6708	119	7.23	1,37	3.02	✓
RG 1500 - 050 - A	RG 1500 - 050 - B	50	1.97	152	5.98	102	4.02			2499	5617	3073	6909	150	9.17	1,51	3.33	✓
RG 1500 - 063 - A	RG 1500 - 063 - B	63	2.48	178	7.01	115	4.53			2538	5707	3139	7056	185	11.26	1,67	3.68	✓
RG 1500 - 075 - A	RG 1500 - 075 - B	75	2.95	202	7.95	127	5.00			2565	5765	3182	7152	216	13.19	1,81	3.99	✓
RG 1500 - 080 - A	RG 1500 - 080 - B	80	3.15	212	8.35	132	5.20	2573	5785	3196	7185	229	13.99	1,87	4.12	✓		
RG 1500 - 100 - A	RG 1500 - 100 - B	100	3.94	252	9.92	152	5.98	2601	5847	3242	7287	282	17.21	2,11	4.65	✓		
RG 1500 - 125 - A	RG 1500 - 125 - B	125	4.92	302	11.89	177	6.97	2624	5899	3280	7373	348	21.24	2,40	5.29	✓		

◆ Disposable

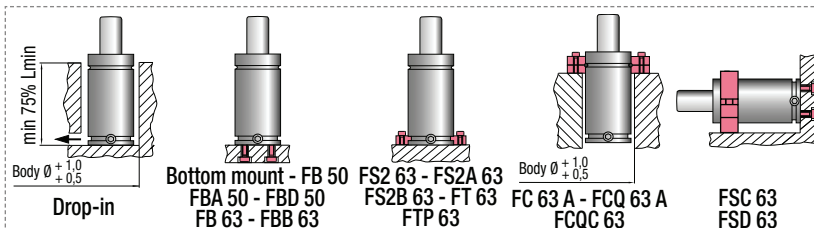

HOW TO ORDER

p. 95

INSTALLATION GUIDELINE

p. 205