

**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio  
The new code will be supplied only when the old will be out of stock

**ACTIVE SAFETY**

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist




Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé



El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

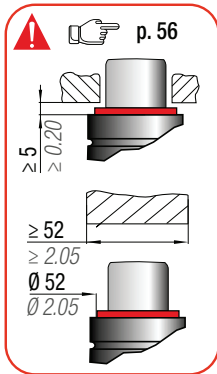

**easu** MANIFOLD p. 247

\*  $F_{1i}$  = Isothermal end force at 100% Cu p. 16  
\*\*  $F_{1p}$  = Polyphropic end force at 100% Cu




RV

	0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 10,18 cm <sup>2</sup> 1.578 in <sup>2</sup>	<b>SPM</b> ~ 20 - 100 (at 20°C)	<b>Max Speed</b> 1,8 m/s	<b>Maintenance kit</b> 39BMRV01500C
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	--	---------------------------------------	-----------------------------	--

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0		F <sub>1i</sub> *		F <sub>1p</sub> **		V0		PED		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>	~Kg	~lb	2014/68/EU
RV 1500 - 010 - B	◆ RV 1500 - 010 - C	10	0.39	64	2.52	54	2.13	1530 ± 5%	3440	2089	4697	2424	5448	44	2.69	0,88	1.94	✓
RV 1500 - 013 - B	◆ RV 1500 - 013 - C	13	0.51	70	2.76	57	2.24			2168	4874	2546	5723	52	3.17	0,91	2.01	✓
RV 1500 - 016 - B	RV 1500 - 016 - C	16	0.63	76	2.99	60	2.36			2230	5012	2642	5939	60	3.66	0,96	2.12	✓
RV 1500 - 019 - B	RV 1500 - 019 - C	19	0.75	82	3.23	63	2.48			2279	5123	2720	6114	68	4.15	0,99	2.18	✓
RV 1500 - 025 - B	RV 1500 - 025 - C	25	0.98	94	3.70	69	2.72			2353	5290	2838	6380	84	5.13	1,06	2.34	✓
RV 1500 - 032 - B	RV 1500 - 032 - C	32	1.26	108	4.25	76	2.99			2414	5426	2935	6599	102	6.22	1,14	2.51	✓
RV 1500 - 038 - B	RV 1500 - 038 - C	38	1.50	120	4.72	82	3.23			2452	5512	2997	6738	118	7.20	1,21	2.67	✓
RV 1500 - 050 - B	RV 1500 - 050 - C	50	1.97	144	5.67	94	3.70			2506	5633	3085	6935	149	9.09	1,36	3.00	✓
RV 1500 - 063 - B	RV 1500 - 063 - C	63	2.48	170	6.69	107	4.21			2544	5720	3148	7078	184	11.23	1,52	3.35	✓
RV 1500 - 075 - B	RV 1500 - 075 - C	75	2.95	194	7.64	119	4.69			2570	5777	3190	7172	215	13.12	1,66	3.66	✓
RV 1500 - 080 - B	RV 1500 - 080 - C	80	3.15	204	8.03	124	4.88	2578	5797	3204	7204	229	13.97	1,72	3.79	✓		
RV 1500 - 100 - B	RV 1500 - 100 - C	100	3.94	244	9.61	144	5.67	2605	5857	3249	7303	281	17.15	1,95	4.30	✓		
RV 1500 - 125 - B	RV 1500 - 125 - C	125	4.92	294	11.57	169	6.65	2628	5907	3286	7387	347	21.18	2,24	4.94	✓		

◆ Disposable

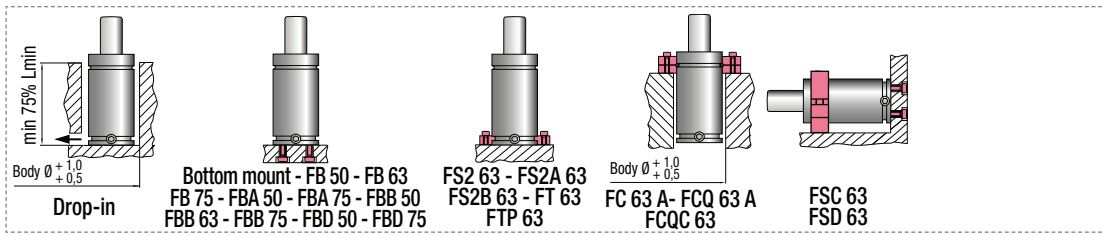

**HOW TO ORDER**

p. 57

**INSTALLATION GUIDELINE**

p. 205