


ACTIVE SAFETY


OSAS

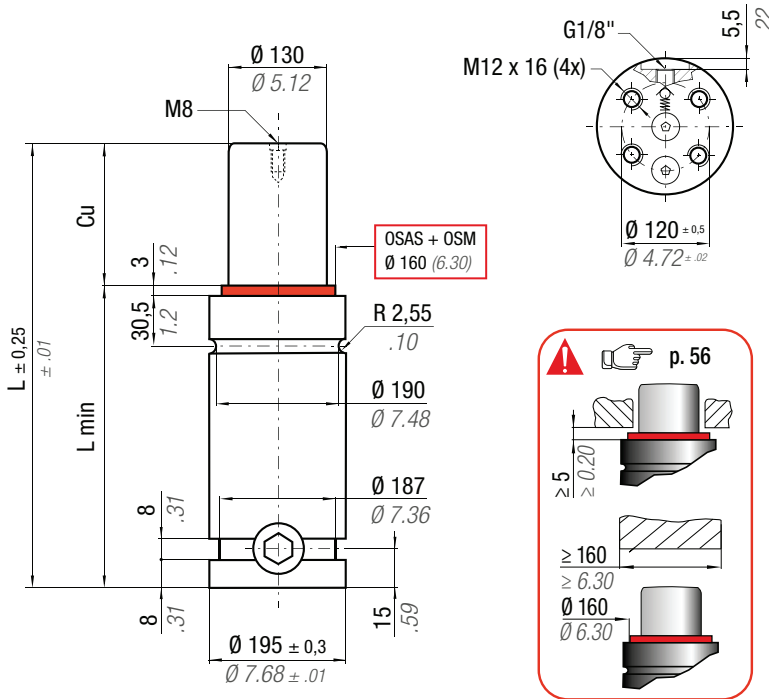


USAS



OPAS

RV


OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguoguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

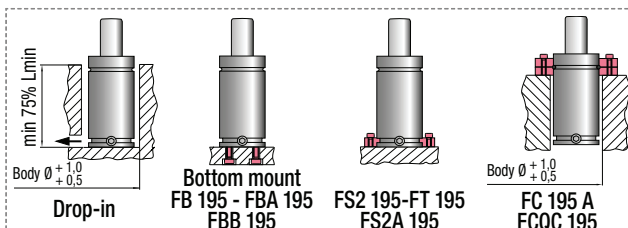
p. 247

 * F_{1i} = Isothermal end force at 100% Cu p. 16
 ** F_{1p} = Polyphoric end force at 100% Cu

	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 132,73 cm ² 20.573 in ²	SPM ~ 20 - 80 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMRV20000A
--	--------------------------	---------------------------	------------------------------	----------------------------	---	-------------------------------	----------------------	---------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0		F _{1i} *		F _{1p} **		V0		PED		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	-Kg	-lb	2014/68/EU
RV 20000 - 019 - A	◆ RV 20000 - 019 - B	19	0.75	148	5.83	129	5.08			27636	62128	32207	72404	1047	63.89	21,58	47.58	✓
RV 20000 - 025 - A	◆ RV 20000 - 025 - B	25	0.98	160	6.30	135	5.32			29099	65417	34490	77537	1215	74.14	22,29	49.14	✓
RV 20000 - 032 - A	RV 20000 - 032 - B	32	1.26	174	6.85	142	5.59	19910	44738	30485	68532	36688	82478	1411	86.10	23,12	50.97	✓
RV 20000 - 038 - A	RV 20000 - 038 - B	38	1.50	186	7.32	148	5.83			31467	70740	38266	86025	1580	96.42	23,84	52.56	✓
RV 20000 - 050 - A	RV 20000 - 050 - B	50	1.97	210	8.27	160	6.30			33024	74242	40801	91724	1916	116.92	25,26	55.69	✓
RV 20000 - 063 - A	RV 20000 - 063 - B	63	2.48	236	9.29	173	6.81			34290	77086	42889	96418	2280	139.13	26,80	59.08	✓
RV 20000 - 075 - A	RV 20000 - 075 - B	75	2.95	260	10.24	185	7.28			35196	79124	44401	99818	2617	159.70	28,22	62.21	✓
RV 20000 - 080 - A	RV 20000 - 080 - B	80	3.15	270	10.63	190	7.48			35519	79850	44943	101035	2757	168.24	28,81	63.52	✓
RV 20000 - 100 - A	RV 20000 - 100 - B	100	3.94	310	12.21	210	8.27		+ 20 °C +68 °F	36574	82222	46724	105039	3317	202.42	31,19	68.76	✓
RV 20000 - 125 - A	RV 20000 - 125 - B	125	4.92	360	14.17	235	9.25			37526	84361	48345	108683	4018	245.19	34,16	75.31	✓

◆ Disposable


HOW TO ORDER

p. 57

INSTALLATION GUIDELINE

p. 205