


ISO 11901 - 1	VDI 3003	B2 4006 (BMW)	075.90.55 (FCA)
W-DX35-6203 (Ford)	PG23D (Mazda)	B8 3180 220 000 001(MB)	K 32 S (Nissan)
E24.54.815.G (PSA)	EM24.54.700 (Renault)	SES-K 5404e (Suzuki)	39D 878 (VW)



**OSAS + OSM** = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

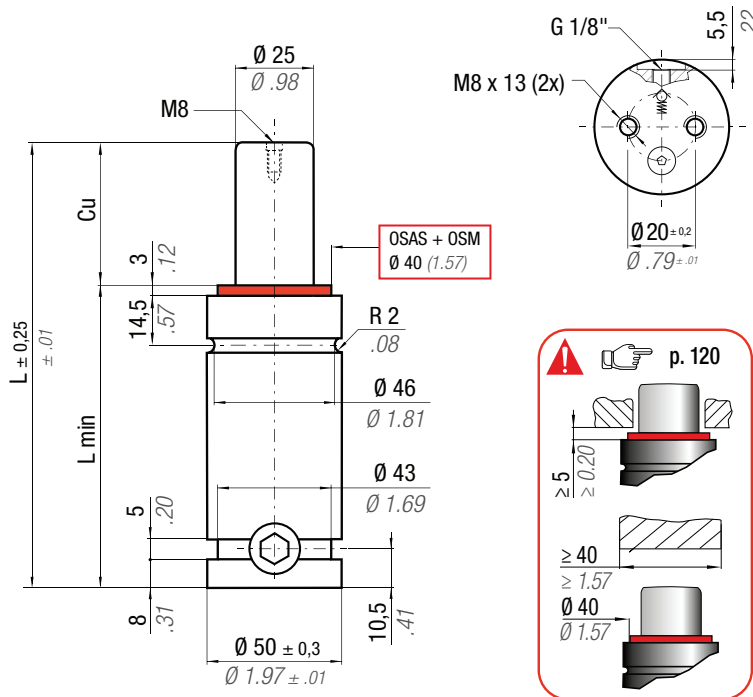

Il nuovo codice sarà fornito solo ad esaurimento del vecchio  
The new code will be supplied only when the old will be out of stock

**ACTIVE SAFETY**



Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

OSAS

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé



El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

USAS

O novo código irá ser fornecido apenas quando o antigo esgotar stock



OPAS


**easu** MANIFOLD p. 247

\*  $F_{1i}$  = Isothermal end force at 100% Cu p. 16  
\*\*  $F_{1p}$  = Polyphoric end force at 100% Cu

	0 - 80 °C 32 - 176 °F	$\Delta P$ ± 0,33 %/°C	<b>P max</b> 150 bar 2175 psi	<b>P min</b> 20 bar 290 psi	<b>S</b> 4,91 cm <sup>2</sup> 0.761 in <sup>2</sup>	<b>SPM</b> ~ 15 - 50 (at 20°C)	<b>Max Speed</b> 1,8 m/s	<b>Maintenance kit</b> 39BMSOC00750D
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	--------------------------------------	-----------------------------	---

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0		F1i *		F1p **		V0		~Kg	~lb	2014/68/EU
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm <sup>3</sup>	in <sup>3</sup>			
SC 750 - 013 - D	♦ SC 750 - 013 - E	12,7	0.50	120,4	4.74	107,7	4.24			922	2073	1039	2335	36	2.21	1,24	2.73	✓
SC 750 - 025 - D	SC 750 - 025 - E	25	0.98	145	5.71	120	4.72			1002	2252	1160	2607	54	3.28	1,34	2.95	✓
SC 750 - 038 - D	SC 750 - 038 - E	38	1.50	171	6.73	133	5.24			1049	2359	1233	2772	73	4.42	1,45	3.20	✓
SC 750 - 050 - D	SC 750 - 050 - E	50	1.97	195	7.68	145	5.71			1077	2422	1277	2871	90	5.47	1,54	3.40	✓
SC 750 - 063 - D	SC 750 - 063 - E	63,5	2.50	222	8.74	158,5	6.24			1099	2471	1312	2949	109	6.65	1,65	3.64	✓
SC 750 - 075 - D	SC 750 - 075 - E	75	2.95	245	9.65	170	6.69			1113	2502	1334	2998	126	7.66	1,75	3.86	✓
SC 750 - 080 - D	SC 750 - 080 - E	80	3.15	255	10.04	175	6.89			1118	2513	1342	3016	133	8.10	1,79	3.95	✓
SC 750 - 088 - D	SC 750 - 088 - E	87,5	3.44	270	10.63	182,5	7.19	740	1664	1128	2535	1357	3052	144	8.76	1,85	4.08	✓
SC 750 - 100 - D	SC 750 - 100 - E	100	3.94	295	11.61	195	7.68	± 5%		1134	2549	1367	3073	161	9.85	1,96	4.32	✓
SC 750 - 113 - D	SC 750 - 113 - E	113	4.45	320	12.60	207	8.15			1144	2571	1383	3109	179	10.94	2,06	4.54	✓
SC 750 - 125 - D	SC 750 - 125 - E	125	4.92	345	13.58	220	8.66	150 bar	2175 psi	1147	2579	1389	3122	197	12.03	2,16	4.76	✓
SC 750 - 138 - D	SC 750 - 138 - E	138	5.43	370	14.57	232	9.13			1158	2604	1407	3162	214	13.05	2,27	5.00	✓
SC 750 - 150 - D	SC 750 - 150 - E	150	5.91	395	15.55	245	9.65	+ 20 °C	+ 68 °F	1168	2626	1423	3198	229	13.97	2,39	5.27	✓
SC 750 - 160 - D	SC 750 - 160 - E	160	6.30	415	16.34	255	10.04			1177	2646	1437	3230	241	14.71	2,49	5.49	✓
SC 750 - 175 - D	SC 750 - 175 - E	175	6.89	445	17.52	270	10.63			1189	2673	1456	3273	259	15.82	2,64	5.82	✓
SC 750 - 200 - D	SC 750 - 200 - E	200	7.87	495	19.49	295	11.61			1206	2711	1483	3335	289	17.65	2,89	6.37	✓
SC 750 - 225 - D	SC 750 - 225 - E	225	8.86	545	21.46	320	12.60			1220	2742	1506	3386	320	19.50	3,13	6.90	✓
SC 750 - 250 - D	SC 750 - 250 - E	250	9.84	595	23.43	345	13.58			1232	2769	1526	3430	350	21.34	3,32	7.32	✓
SC 750 - 275 - D	SC 750 - 275 - E	275	10.83	645	25.39	370	14.57			1242	2791	1542	3467	380	23.18	3,63	8.00	✓
SC 750 - 300 - D	SC 750 - 300 - E	300	11.81	695	27.36	395	15.55			1250	2811	1557	3500	410	25.02	3,88	8.55	✓

♦ Disposable

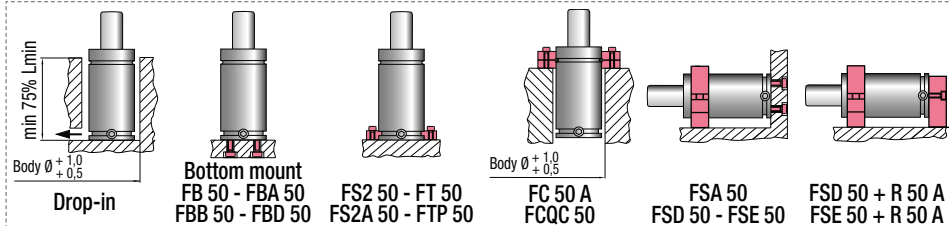

**HOW TO ORDER**

p. 121

**INSTALLATION GUIDELINE**

p. 205