

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER



Il nuovo codice sarà fornito solo ad esaurimento del vecchio

ACTIVE SAFETY

The new code will be supplied only when the old will be out of stock



Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé



El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock





* F_{1i} = Isothermal end force at 100% Cu **p. 16**
 ** F_{1p} = Polytrophic end force at 100% Cu **p. 16**

| | | | | | | | | |
|----------------------|---------------------------------|--|-------------------------------------|-----------------------------------|---|---------------------------------------|-----------------------------|---------------------------------------|
| N₂ | 0 - 80 °C 32 - 176 °F | ΔP $\pm 0,33 \% / ^\circ C$ | P max 150 bar 2175 psi | P min 20 bar 290 psi | S 1,77 cm ² 0,274 in ² | SPM ~ 80 - 100 (at 20°C) | Max Speed 1,8 m/s | Maintenance kit 39BMS00250E |
|----------------------|---------------------------------|--|-------------------------------------|-----------------------------------|---|---------------------------------------|-----------------------------|---------------------------------------|

| CODE PHASING OUT from 04/2021 | NEW | Cu | | L | | L min | | F ₀ Initial force | | F _{1i} * End force * | | F _{1p} ** End force ** | | V ₀ | | PED 2014/68/EU | | |
|-------------------------------------|---------------------|------|------|------|-------|-------|------|---------------------------------|---------------------|----------------------------------|-----|------------------------------------|------|-----------------|-----------------|-------------------|------|---|
| | | mm | inch | mm | inch | mm | inch | daN | lb | daN | lb | daN | lb | cm ³ | in ³ | ~Kg | ~lb | ✓ |
| SCF 250 - 010 - D | ◆ SCF 250 - 010 - E | 10 | 0.39 | 70 | 2.76 | 60 | 2.36 | 260 585 ± 5% | 150 bar 2175 psi | 305 | 685 | 334 | 750 | 16,0 | 0.98 | 0,37 | 0.81 | ✓ |
| SCF 250 - 013 - D | ◆ SCF 250 - 013 - E | 12,7 | 0.50 | 75,4 | 2.97 | 62,7 | 2.47 | | | 310 | 698 | 342 | 769 | 18,1 | 1.10 | 0,38 | 0.84 | ✓ |
| SCF 250 - 016 - D | SCF 250 - 016 - E | 16 | 0.63 | 82 | 3.23 | 66 | 2.60 | | | 316 | 711 | 350 | 788 | 20,6 | 1.26 | 0,39 | 0.86 | ✓ |
| SCF 250 - 019 - D | SCF 250 - 019 - E | 19 | 0.75 | 88 | 3.46 | 69 | 2.72 | | | 320 | 720 | 357 | 802 | 22,9 | 1.40 | 0,42 | 0.92 | ✓ |
| SCF 250 - 025 - D | SCF 250 - 025 - E | 25 | 0.98 | 100 | 3.94 | 75 | 2.95 | | | 327 | 734 | 366 | 823 | 27,4 | 1.67 | 0,44 | 0.97 | ✓ |
| SCF 250 - 038 - D | SCF 250 - 038 - E | 38 | 1.50 | 126 | 4.96 | 88 | 3.46 | | | 336 | 755 | 380 | 853 | 37,3 | 2.28 | 0,50 | 1.10 | ✓ |
| SCF 250 - 050 - D | SCF 250 - 050 - E | 50 | 1.97 | 150 | 5.91 | 100 | 3.94 | | | 341 | 766 | 387 | 870 | 46,5 | 2.84 | 0,55 | 1.21 | ✓ |
| SCF 250 - 063 - D | SCF 250 - 063 - E | 63,5 | 2.50 | 177 | 6.97 | 113,5 | 4.47 | | | 345 | 775 | 393 | 884 | 56,7 | 3.46 | 0,63 | 1.39 | ✓ |
| SCF 250 - 080 - D | SCF 250 - 080 - E | 80 | 3.15 | 210 | 8.27 | 130 | 5.12 | | | 348 | 782 | 398 | 894 | 69,3 | 4.23 | 0,70 | 1.54 | ✓ |
| SCF 250 - 100 - D | SCF 250 - 100 - E | 100 | 3.94 | 250 | 9.84 | 150 | 5.91 | | | 351 | 789 | 403 | 905 | 84,2 | 5.14 | 0,75 | 1.65 | ✓ |
| SCF 250 - 125 - D | SCF 250 - 125 - E | 125 | 4.92 | 300 | 11.81 | 175 | 6.89 | 355 | 798 | 409 | 919 | 101,6 | 6.20 | 0,93 | 2.05 | ✓ | | |

◆ Disposable

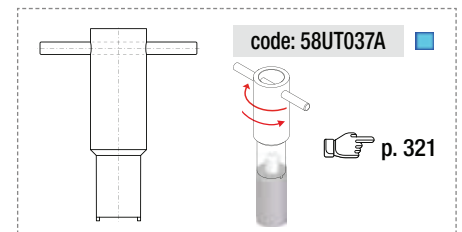

HOW TO ORDER

p. 121

INSTALLATION GUIDELINE

p. 205