



SPRING PLUNGER - FEDERNE DRUCKSTÜCKE - ESPULSORE A MOLLA

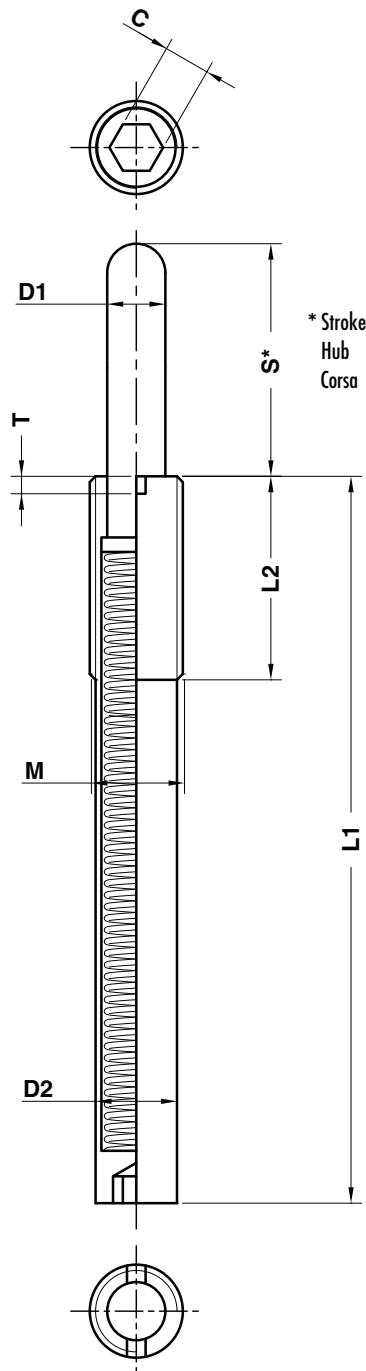

Spring plungers can be fitted/
removed by means of the slot or
internal hexagon.

Montage/demontage mit
Innensechskant und Schlitz
möglich.

Il montaggio/smontaggio
avviene sia tramite l'esagono
incassato, che tramite l'intaglio
frontale.



Notes

Material: Steel

ORDER EXAMPLE	Art.	M=M16	S=40
	C16.40.	M16	40

OMCR CODE	C	D1	D2	F1 (N)	F2 (N)	L1	L2	M	S	T
C16.40.M1210	4	5,5	9,5	7	40	45	35	M12	10	2
C16.40.M1615	5	8	13,4	15	80	60	35	M16	15	3
C16.40.M1620	5	8	13,4	17	80	85	35	M16	20	3
C16.40.M1630	5	8	13,4	20	80	125	35	M16	30	3
C16.40.M1640	8	8	13,4	20	80	125	35	M16	40	3
C16.40.M1650	8	8	13,4	30	100	155	35	M16	50	3
C16.40.M1660	8	8	13,4	20	80	155	35	M16	60	3
C16.40.M2415	8	10	19,6	40	200	60	45	M24	15	3
C16.40.M3020	12	15	22,5	50	300	80	45	M30	20	3