

OSAS + OSM = OVER STROKE ACTIVE SAFETY + OVER STROKE MARKER

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

easu MANIFOLD p. 247

* F_{1i} = Isothermal end force at 100% Cu p. 16

** F_{1p} = Polyphoric end force at 100% Cu



ACTIVE SAFETY



OSAS



USAS




OPAS

	0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 150 bar 2175 psi	P min 20 bar 290 psi	S 4,91 cm ² 0.761 in ²	SPM ~ 20 ÷ 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit 39BMH00700D
--	--------------------------	---------------------------	-------------------------------------	-----------------------------------	---	---------------------------------------	-----------------------------	---------------------------------------

CODE PHASING OUT from 04/2021	NEW	Cu		L		L min		F0		F _{1i} *		F _{1p} **		V0		PED		
		mm	inch	mm	inch	mm	inch	daN	lb	daN	lb	daN	lb	cm ³	in ³	~Kg	~lb	2014/68/EU
H 700 - 010 - D	◆ H 700 - 010 - E	10	0.39	105	4.13	95	3.74	740 1664 ± 5%	150 bar 2175 psi	967	2173	1106	2487	24,0	1.46	0,90	1.98	✓
H 700 - 013 - D	H 700 - 013 - E	13	0.50	110,7	4.35	97,7	3.85			1010	2271	1173	2636	27,4	1.67	0,91	2.01	✓
H 700 - 025 - D	H 700 - 025 - E	25	0.98	135	5.31	110	4.33			1108	2490	1325	2980	42,2	2.58	1,00	2.20	✓
H 700 - 038 - D	H 700 - 038 - E	38	1.50	161	6.34	123	4.84			1168	2625	1422	3196	58,1	3.55	1,09	2.40	✓
H 700 - 050 - D	H 700 - 050 - E	50	1.97	185	7.28	135	5.31			1202	2703	1478	3323	72,7	4.44	1,17	2.58	✓
H 700 - 063 - D	H 700 - 063 - E	63	2.48	211,5	8.33	148,5	5.85			1224	2752	1514	3403	89,0	5.43	1,26	2.78	✓
H 700 - 080 - D	H 700 - 080 - E	80	3.15	245	9.65	165	6.50			1252	2814	1559	3505	109,2	6.66	1,37	3.02	✓
H 700 - 100 - D	H 700 - 100 - E	100	3.94	285	11.22	185	7.28			1271	2856	1590	3575	133,5	8.15	1,51	3.33	✓
H 700 - 125 - D	H 700 - 125 - E	125	4.92	335	13.19	210	8.27			1287	2892	1617	3635	163,9	10.00	1,67	3.68	✓
H 700 - 160 - D	H 700 - 160 - E	160	6.30	405	15.94	245	9.65			1301	2926	1642	3691	206,5	12.60	1,91	4.21	✓
■ H 700 - 200 - D	H 700 - 200 - E	200	7.87	485	19.09	285	11.22	1313	2951	1660	3733	255,2	15.57	2,20	4.85	✓		

◆ Disposable

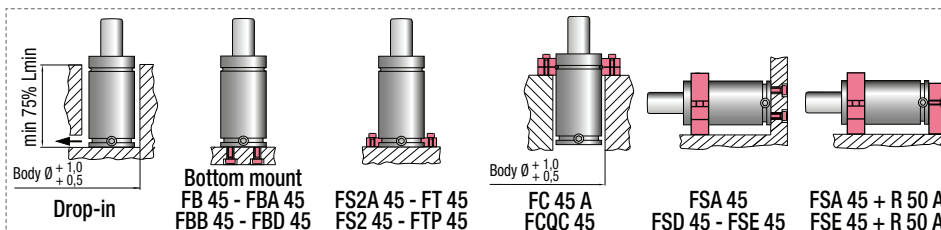

HOW TO ORDER

p. 135

INSTALLATION GUIDELINE

p. 205