

Il nuovo codice sarà fornito solo ad esaurimento del vecchio

The new code will be supplied only when the old will be out of stock

Der neue Kode wird nur angegeben, wenn der alte nicht mehr lieferbar ist

Le nouveau code sera fourni uniquement lorsque le vieux stock sera écoulé

El nuevo código será suministrado sólo cuando se agoten las existencias del antiguo

O novo código irá ser fornecido apenas quando o antigo esgotar stock

* $F_{1i} =$



Isothermal end force at 100% Cu



p. 16

** $F_{1p} =$

Polytrophic end force at 100% Cu



ACTIVE SAFETY



OSAS



USAS





OPAS



SKUDO

RS

N ₂		0 - 80 °C 32 - 176 °F	ΔP ± 0,33 %/°C	P max 180 bar 2610 psi	P min 20 bar 290 psi	S 1,77 cm ² 0,27 in ²	SPM ~ 40 - 100 (at 20°C)	Max Speed 1,8 m/s	Maintenance kit Disposable	
CODE	NEW	Cu	L	L min	F ₀	F _{1i} *	F _{1p} **	V ₀	~Kg ~lb	PED 2014/68/EU
PHASING OUT from 01/2020		mm inch	mm inch	mm inch	Initial force daN lb	End force * daN lb	End force ** daN lb	cm ³ in ³		
RS 320 - 007 - B	RS 320 - 007 - C	7 0.28	50 1.97	43 1.69	320 719 ± 5%	424 953	474 1066	6,1 0.37	0,10 0.23	✓
RS 320 - 010 - B	RS 320 - 010 - C	10 0.39	56 2.20	46 1.81		448 1007	508 1142	7,4 0.45	0,11 0.24	✓
RS 320 - 012 - B	RS 320 - 012 - C	12 0.47	60 2.36	48 1.89		461 1036	526 1182	8,3 0.51	0,11 0.25	✓
RS 320 - 016 - B	RS 320 - 016 - C	16 0.63	68 2.68	52 2.05		481 1081	554 1245	10,1 0.62	0,12 0.26	✓
RS 320 - 022 - B	RS 320 - 022 - C	22 0.87	80 3.15	58 2.28		501 1126	584 1313	12,8 0.78	0,13 0.29	✓
RS 320 - 029 - B	RS 320 - 029 - C	29 1.14	94 3.70	65 2.56		518 1165	608 1367	16,0 0.98	0,14 0.31	✓
RS 320 - 035 - B	RS 320 - 035 - C	35 1.38	106 4.17	71 2.80		528 1187	623 1401	18,7 1.14	0,15 0.33	✓
RS 320 - 047 - B	RS 320 - 047 - C	47 1.85	130 5.12	83 3.27		542 1218	643 1446	24,1 1.47	0,17 0.38	✓
RS 320 - 060 - B	RS 320 - 060 - C	60 2.36	156 6.14	96 3.78		551 1239	658 1479	30,0 1.83	0,19 0.43	✓
RS 320 - 072 - B	RS 320 - 072 - C	72 2.83	185 7.28	113 4.45		550 1236	656 1475	36,1 2.20	0,22 0.48	✓
RS 320 - 077 - B	RS 320 - 077 - C	77 3.03	195 7.68	118 4.65	553 1243	660 1484	38,4 2.34	0,23 0.50	✓	
RS 320 - 097 - B	RS 320 - 097 - C	97 3.82	235 9.25	138 5.43	560 1259	672 1511	47,4 2.89	0,26 0.57	✓	
RS 320 - 122 - B	RS 320 - 122 - C	122 4.80	285 11.22	163 6.42	567 1275	681 1531	58,7 3.58	0,30 0.66	✓	

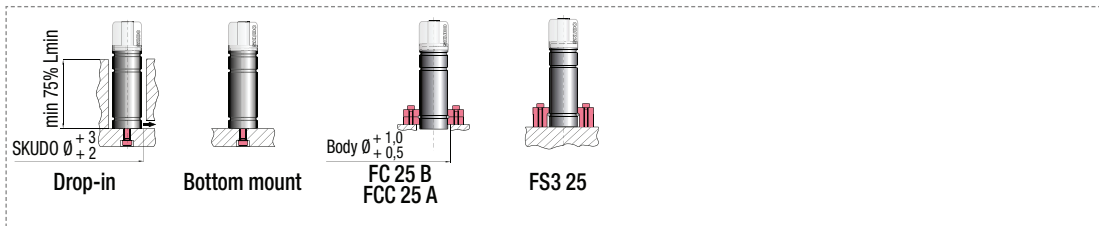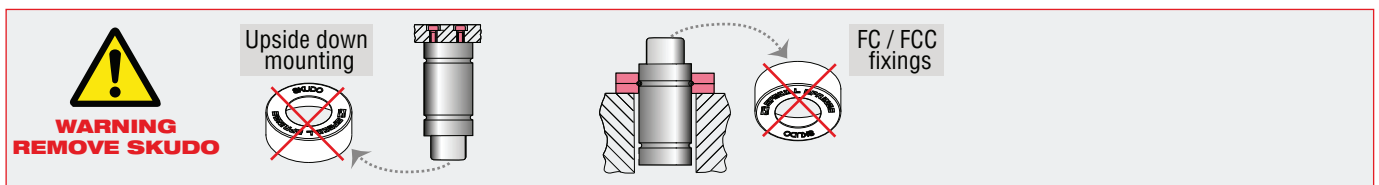

HOW TO ORDER
p. 73

INSTALLATION GUIDELINE
p. 205